


AMP102 SPECIFICATIONS

- Stereo (8 ohm): 50W RMS per channel at 8 ohms,
20Hz - 20kHz, <0.1% THD+N
- Stereo (4 ohm): 75W per channel at 4 ohms,
20Hz-20kHz, <1% THD+N
- Bridged Mono (8 ohm): 150W RMS at 8 ohms,
20Hz - 20kHz, <0.2% THD+N
- Frequency Response: 10Hz - 50kHz, +0dB, -3dB
- Signal to Noise Ratio: 100dB A-weighted, referred to rated
power at 4 ohms
- Channel Separation: 65dB @ 1kHz, referred to rated power
at 8 ohms
- Sensitivity: Variable, 350mV to 2.8V for rated
power at 8 ohms
- AC Power Consumption: 500W maximum
- Net Weight: 14.7lbs / 6.7kgs
- Gross Weight: 15.9lbs / 7.2kgs

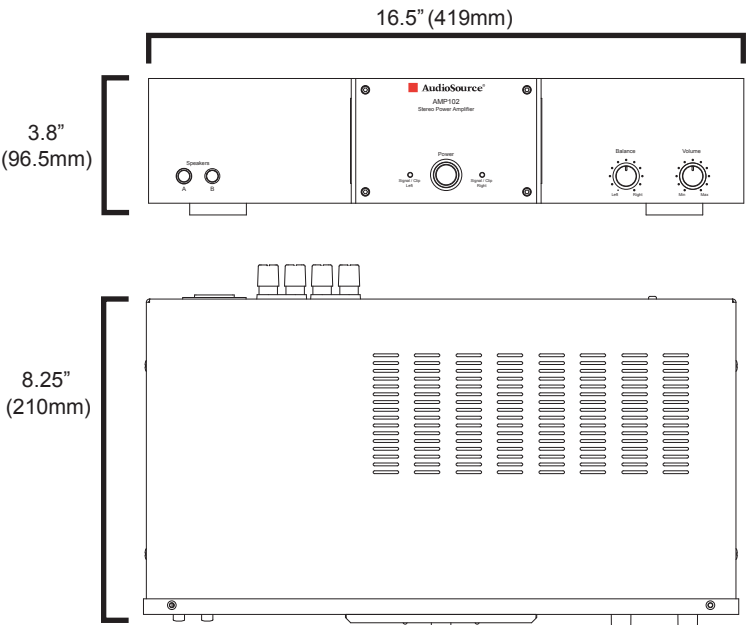

AMP110 SPECIFICATIONS

- Stereo (8 ohm): 75W RMS per channel at 8 ohms,
20Hz - 20kHz, <0.1% THD+N
- Stereo (4 ohm): 110W per channel at 4 ohms,
20Hz-20kHz, <0.1% THD+N
- Bridged Mono (8 ohm): 225W RMS at 8 ohms,
20Hz - 20kHz, <0.1% THD+N
- Frequency Response: 10Hz - 50kHz, +0dB, -3dB
- Signal to Noise Ratio: 100dB A-weighted, referred to rated
power at 4 ohms
- Channel Separation: 70dB @ 1kHz, referred to rated power
at 8 ohms
- Sensitivity: Variable, 350mV to 2.8V for rated
power at 8 ohms
- AC Power Consumption: 600W maximum
- Net Weight: 23.1lbs / 10.5kgs
- Gross Weight: 30.8lbs / 14.0kgs

